

Week 6: Intro to Loops

Gaddis: 5.2-6

CS 1428
Fall 2014

Jill Seaman

1


Control Flow (order of execution)

- So far, control flow in our programs has included:
 - ▶ sequential processing (1st statement, then 2nd statement...)
 - ▶ branching (conditionally skip some statements).
- Chapter 5 introduces loops, which allow us to conditionally repeat execution of some statements.
 - ▶ while loop
 - ▶ do-while loop
 - ▶ for loop

2

5.2 The while loop

- As long as the relational expression is true, repeat the statement

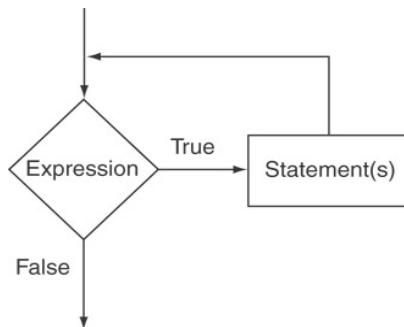

3

while syntax and semantics

- The while statement is used to repeat statements:

```
while (expression)  
statement
```

- How it works:
 - ▶ expression is evaluated:
 - ▶ If it is true, then statement is executed, then it starts over (and expression is evaluated again).
 - ▶ If (when) it is false, then statement is skipped (and the loop is done).

4

while example

- Example:

```
int number = 1;

while (number <= 3)
{
    cout << "Student" << number << endl;
    number = number + 1;
}

cout << "Done" << endl;
```

Hand trace!

- Output

```
Student1
Student2
Student3
Done
```

5

5.3 Using while for input validation

- Inspect user input values to make sure they are valid.
- If not valid, ask user to re-enter value:

```
int number;

cout << "Enter a number between 1 and 10: ";
cin >> number;

while (number < 1 || number > 10) {
    cout << "Please enter a number between 1 and 10: ";
    cin >> number;
}

// Do something with number here
```

This expression is true when number is OUT of range.

Explain the valid values in the prompt

Don't forget to input the next value

6

Input Validation

- Checking for valid characters:

```
char answer;

cout << "Enter the answer to question 1 (a,b,c or d): ";
cin >> answer;

while (answer != 'a' && answer != 'b' &&
       answer != 'c' && answer != 'd')
{
    cout << "Please enter a letter a, b, c or d: ";
    cin >> answer;
}

// Do something with answer here
```

7

5.4 Counters

- Counter: a variable that is incremented (or decremented) each time a loop repeats.
- Used to keep track of the number of iterations (how many times the loop has repeated).
- **Must be initialized before entering loop!!!!**

8

Counters

- Example (how many times do they enter an invalid number?):

```
int number;
int count = 0;

cout << "Enter a number between 1 and 10: ";
cin >> number;

while (number < 1 || number > 10) {
    count = count + 1;
    cout << "Please enter a number between 1 and 10: ";
    cin >> number;
}

cout << count << " invalid numbers entered " << endl;

// Do something with number here
```

Counters

- Example, using the counter to control how many times the loop iterates:

```
cout << "Number   Number Squared" << endl;
cout << "-----" << endl;


int num = 1; // counter variable
while (num <= 8) {
    cout << num << "           " << (num * num) << endl;
    num = num + 1; // increment the counter
}
```

- Output:

Number	Number Squared
1	1
2	4
3	9
4	16
5	25
6	36
7	49
8	64

5.5 The do-while loop

- Execute the statement(s), then repeat as long as the relational expression is true.

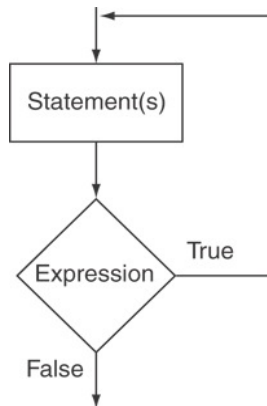

do-while syntax and semantics

- The do-while loop has the test expression at the end:

```
do
    statement
while (expression);
```

Don't forget the semicolon at the end

- How it works:

- ▶ statement is executed.
- ▶ expression is evaluated:
- ▶ If it is true, then it starts over (and statement is executed again).
- ▶ If (when) it is false, the loop is done.

- statement always executes at least once. ¹²

do-while example

- Example:

```
int number = 1;
do
{
    cout << "Student" << number << endl;
    number = number + 1;
} while (number <= 3);

cout << "Done" << endl;
```

- Output

```
Student1
Student2
Student3
Done
```

13

do-while with menu

```
char choice;

do {
    cout << "A: Make a reservation." << endl;
    cout << "B: View flight status." << endl;
    cout << "C: Check-in for a flight." << endl;
    cout << "D: Quit the program." << endl;
    cout << "Enter your choice: ";

    cin >> choice;

    switch (choice) {
        case 'A': // code to make a reservation
            break;
        case 'B': // code to view flight status
            break;
        case 'C': // code to process check-in
            break;
    }
} while(choice != 'D');
```

14

Different ways to control the loop

- Conditional loop: body executes as long as a certain condition is true
 - ▶ input validation: loops as long as input is invalid
- Count-controlled loop: body executes a specific number of times using a counter
 - ▶ actual count may be a literal, or stored in a variable.
- Count-controlled loop follows a pattern:
 - ▶ initialize counter to zero (or other start value).
 - ▶ test counter to make sure it is less than count.
 - ▶ update counter during each iteration.

15

5.6 The for loop


- The for statement is used to easily implement a count-controlled loop.

```
for (expr1; expr2; expr3)
    statement
```

- How it works:
 - ▶ `expr1` is executed (initialization)
 - ▶ `expr2` is evaluated (test)
 - ▶ If it is true, then `statement` is executed, then `expr3` is executed (update), then start over.
 - ▶ If (when) it is false, then `statement` is skipped (and the loop is done).

16

The for loop flow chart

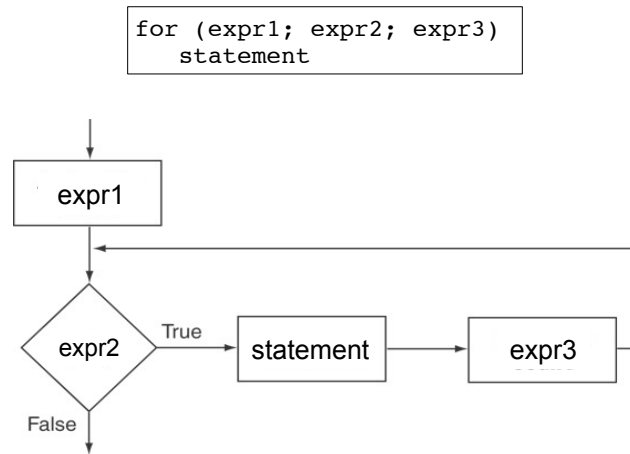

17

The for loop and the while loop

- The for statement

```
for (expr1; expr2; expr3)
  statement
```

- is equivalent to the following code using a while statement:

```
expr1;           // initialize
while (expr2) {  // test
  statement
  expr3;         // update
}
```

18

for loop example

- Example:

```
int number;
for (number = 1; number <= 3; number++)
{
  cout << "Student" << number << endl;
}
cout << "Done" << endl;
```

Equivalent to
number = number + 1

Note: no semicolon

- Output

```
Student1
Student2
Student3
Done
```

19

Counters: redo

- Example, using the counter to control how many times the loop iterates:

```
cout << "Number Number Squared" << endl;
cout << "-----" << endl;

int num = 1;           // counter variable
while (num <= 8) {
  cout << num << " " << (num * num) << endl;
  num = num + 1;      // increment the counter
}
```

- Rewritten using a for loop:

```
cout << "Number Number Squared" << endl;
cout << "-----" << endl;

int num;
for (num = 1; num <= 8; num++)
  cout << num << " " << (num * num) << endl;
```

20

Define variable in init-expr

- You may define the loop counter variable inside the for loop's initialization expression:

```
for (int x = 10; x > 0; x=x-2)
    cout << x << endl;

cout << x << endl; //ERROR, can't use x here
```

Hand trace!

- Do NOT try to access x outside the loop (the scope of x is the for loop statement ONLY)
- What is the output of the for loop?

21

User-controlled count

- You may use value input by the user to control the number of iterations:

```
int maxCount;
cout << "How many squares do you want?" << endl;
cin >> maxCount;

cout << "Number  Number Squared" << endl;
cout << "-----  -----" << endl;

for (int num = 1; num <= maxCount; num++)
    cout << num << "          " << (num * num) << endl;
```

- How many times does the loop iterate?

22

The exprs in the for are optional

- You may omit any of the three exprs in the for loop header

```
int value, incr;
cout << "Enter the starting value: ";
cin >> value;

for ( ; value <= 100; )
{
    cout << "Please enter the next increment amount: ";
    cin >> incr;
    value = value + incr;
    cout << value << endl;
}
```

- Style: use a while loop for something like this.
- When expr2 is missing, it is true by default.