

Stacks and Queues

Week 9

Gaddis: Chapter 18

CS 5301
Fall 2017

Jill Seaman

1

Introduction to the Stack

- **Stack**: a data structure that holds a collection of elements of the same type.
 - The elements are accessed according to LIFO order: last in, first out
 - No random access to other elements
- **Examples**:
 - plates in a cafeteria
 - bangles . . .


2

Stack Operations

- **Operations**:
 - **push**: add a value onto the top of the stack
 - make sure it's not full first.
 - **pop**: remove (and return) the value from the top of the stack
 - make sure it's not empty first.
 - **isFull**: true if the stack is currently full, i.e., has no more space to hold additional elements
 - **isEmpty**: true if the stack currently contains no elements

3

Stack illustrated

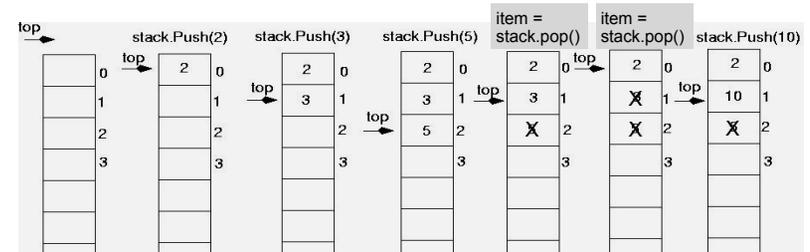

```
int item;
stack.push(2);
stack.push(3);
stack.push(5);
item = stack.pop(); //item is 5
item = stack.pop(); //item is 3
stack.push(10);
```

4

Implementing a Stack Class

- Array implementations:
 - fixed size (static) arrays: size doesn't change
 - dynamic arrays: can resize as needed in push
- Linked List
 - grow and shrink in size as needed
- Templates
 - any of the above can be implemented using templates

5

A static stack class

```
class IntStack
{
private:
    const static int STACKSIZE = 100; // The stack size
    int stackArray[STACKSIZE];       // The stack array
    int top;                          // Index to the top of the stack

public:
    // Constructor
    IntStack() { top = -1; } // empty stack

    // Stack operations
    void push(int);
    int pop();
    bool isFull() const;
    bool isEmpty() const;
};
```

6

A static stack class: push&pop

```
/**
 * Member function push pushes the argument onto
 * the stack.
 */
```

```
void IntStack::push(int num)
{
    assert(!isFull());

    top++;
    stackArray[top] = num;
}
```

assert will abort the program if its argument evaluates to false it requires `#include <cassert>`

```
/**
 * Member function pop pops the value at the top
 * of the stack off, and returns it.
 */
```

```
int IntStack::pop()
{
    assert(!isEmpty());

    int num = stackArray[top];
    top--;
    return num;
}
```

7

A static stack class: functions

```
/**
 * Member function isFull returns true if the stack
 * is full, or false otherwise.
 */
```

```
bool IntStack::isFull() const
{
    return (top == STACKSIZE - 1);
}
```

```
/**
 * Member function isEmpty returns true if the stack
 * is empty, or false otherwise.
 */
```

```
bool IntStack::isEmpty() const
{
    return (top == -1);
}
```

8

A Dynamic Stack Class: Linked List implementation

- Push and pop from the head of the list:

```

//*****
// Member function push pushes the argument onto *
// the stack. *
//*****

```

```

void DynIntStack::push(int num)
{
    assert(!isFull());

    Node *temp=new Node;
    temp->data = num;

    //insert at head of list
    temp->next = head;
    head = temp;
}

```

```

private:
    struct Node {
        int data;
        Node* next;
    };
    Node* head; // ptr to top

```

9

A Dynamic Stack Class: Linked List implementation

- Push and pop from the head of the list:

```

//*****
// Member function pop pops the value at the top *
// of the stack off, and returns it. *
//*****

```

```

int DynIntStack::pop()
{
    assert(!isEmpty());

    int result = head->data;
    Node * temp = head;
    head = head->next;
    delete temp;
    return result;
}

```

```

private:
    struct Node {
        int data;
        Node* next;
    };
    Node* head; // ptr to top

```

10

Introduction to the Queue

- Queue: a data structure that holds a collection of elements of the same type.
 - The elements are accessed according to FIFO order: first in, first out
 - No random access to other elements
- Examples:
 - people in line at a theatre box office
 - restocking perishable inventory

11


Queue Operations

- Operations:
 - enqueue: add a value onto the rear of the queue (the end of the line)
 - make sure it's not full first.
 - dequeue: remove a value from the front of the queue (the front of the line) "Next!"
 - make sure it's not empty first.
 - isFull: true if the queue is currently full, i.e., has no more space to hold additional elements
 - isEmpty: true if the queue currently contains no elements

12

Implementing a Queue: Array

- When is it full? $(\text{rear}+1)\% \text{queueSize} == \text{front}$



- When is it empty? $(\text{rear}+1)\% \text{queueSize} == \text{front}$

one element left:



no elements left, front passes rear:



- Don't use rear and front to determine if the queue is full or empty!!

17

A static queue class

```
class IntQueue
{
private:
    const static int QUEUESIZE = 100; // capacity of queue
    int queueArray[QUEUESIZE]; // The queue array
    int front; // Subscript of the queue front
    int rear; // Subscript of the queue rear
    int numItems; // Number of items in the queue
public:
    // Constructor
    IntQueue() { front = 0; rear = -1; numItems = 0; }

    // Queue operations
    void enqueue(int);
    int dequeue();
    bool isEmpty() const;
    bool isFull() const;
};
```

18

A static queue: enqueue/dequeue

```

//*****
// Enqueue inserts a value at the rear of the queue. *
//*****

void IntQueue::enqueue(int num)
{
    assert(!isFull());

    rear = (rear + 1) % QUEUESIZE;
    queueArray[rear] = num;
    numItems++;
}

//*****
// Dequeue removes the value at the front of the *
// queue and returns the value. *
//*****

int IntQueue::dequeue()
{
    assert(!isEmpty());

    int result = queueArray[front];
    front = (front + 1) % QUEUESIZE;
    numItems--;
    return result;
}
```

19

A static queue class: functions

```

//*****
// isEmpty returns true if the queue is empty *
//*****

bool IntQueue::isEmpty() const {
    return (numItems == 0);
}


//*****
// isFull returns true if the queue is full *
//*****

bool IntQueue::isFull() const {
    return (numItems == QUEUESIZE);
}
```

20

A Dynamic Queue Class: Linked List implementation

- Use pointers `front` and `rear` to point to first and last elements of the list:

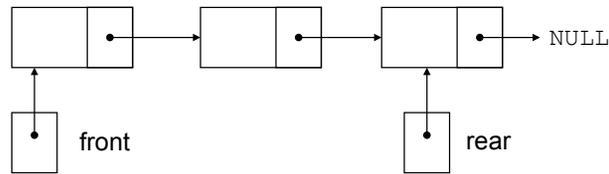

21

A Dynamic Queue Class: Linked List implementation

- Enqueue at the rear of the list, dequeue from the front:

```

//*****
// Enqueue inserts a value at the rear of the queue. *
//*****

void DynIntQueue::enqueue(int num)
{
    assert(!isFull());

    Node *temp=new Node;
    temp->data = num;
    temp->next = NULL;

    //append to rear of list, reset rear
    if (isEmpty())
        front = rear = temp;
    else {
        rear->next = temp;
        rear = temp;
    }
}
    
```

22

A Dynamic Queue Class: Linked List implementation

- Enqueue at the rear of the list, dequeue from the front:

```

//*****
// Dequeue removes the value at the front of the *
// queue and returns the value. *
//*****

int DynIntQueue::dequeue()
{
    assert(!isEmpty());

    int value = front->data;

    // remove the first node (front)
    Node *temp = front;
    front = front->next;
    delete temp;

    if (front==NULL) rear = NULL;
    return value;
}
    
```

23

Sample Problem

- See Gaddis 7.12 (or google) for a description of the STL vector type.
- Implement the following `IntStack` using a vector (instead of an array) to store the elements.

```

class IntStack {
private:
    vector<int> stack; // store elements in a vector

public:
    // Constructor
    IntStack() { } // stack vector is already empty
    // Stack operations
    void push(int);
    int pop();
    bool isFull() const;
    bool isEmpty() const;
};
    
```

24